

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date  
19 February 2004 (19.02.2004)

PCT

(10) International Publication Number  
**WO 2004/015819 A1**

(51) International Patent Classification<sup>7</sup>: **H01R 13/627**

SEJOURNE, Damien [FR/FR]; 11, impasse des Pom-  
miers, F-72650 La Bazoge (FR). LEROYER, Serge  
[FR/FR]; 78, rue Coëffort Résidence Atines, F-72000 Le  
Mans (FR).

(21) International Application Number:

PCT/EP2003/050351

(22) International Filing Date: 30 July 2003 (30.07.2003)

(74) Agent: **CAMUS, Olivier**; Cabinet Christian Schmit et As-  
sociés, 8, place du Ponceau, F-95000 Cergy (FR).

(25) Filing Language:

English

(81) Designated States (national): CN, JP, KR, US.

(26) Publication Language:

English

(84) Designated States (regional): European patent (AT, BE,  
BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,  
IE, IT, LU, MC, NL, PT, SE, SI, SK, TR).

(30) Priority Data:  
02 10018 6 August 2002 (06.08.2002) FR

Published:

— with international search report

(71) Applicant (for all designated States except US): **FCI**


[FR/FR]; 53, rue de Châteaudun, F-75009 Paris (FR).

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LE GALLIC, Hervé**  
[FR/FR]; 15, rue de la Groseillière, F-72400 Cherreau (FR).

(54) Title: PLUG CONNECTOR PROVIDED WITH MEANS FOR LATERAL LOCKING

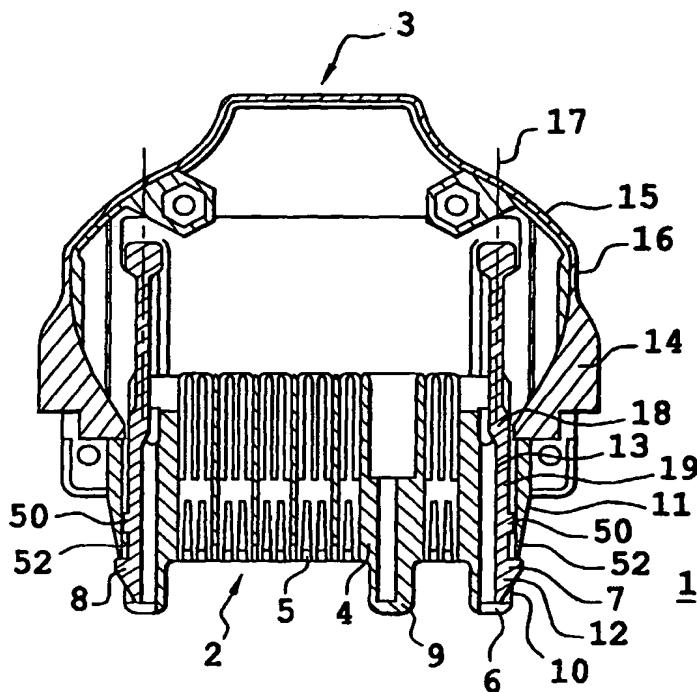

(57) Abstract: Connector (1) fitted to the end of a cable and provided with lateral locking means (7) provided so as to interact with a receptacle of a complementary device with which the plug connector is connected. The locking means comprise a tongue (13) exhibiting a stump (12) passing from a lateral slot (10) of the connector. The tongue is retained in a base (4) of the connector by means of piercing means (38, 39) which are themselves retained in the base. In addition to this, the locking means comprise anchoring means in order to be retained in a cover (16) surrounding this base.